

**Rough
Finishing**

Genuine

Liquid compound for barrel finishing LC-613

Degreasing without Rust

Degreasing



**Rust
inhibiting**



**Double
Benefit**

Liquid compound for rough barrel finishing process LC-613


NOT containing substances listed in RoHS directive

NOT containing substances listed in ELV directive


Boron-free

Nitrite-free

Distribution of degreasing and rust inhibiting performance

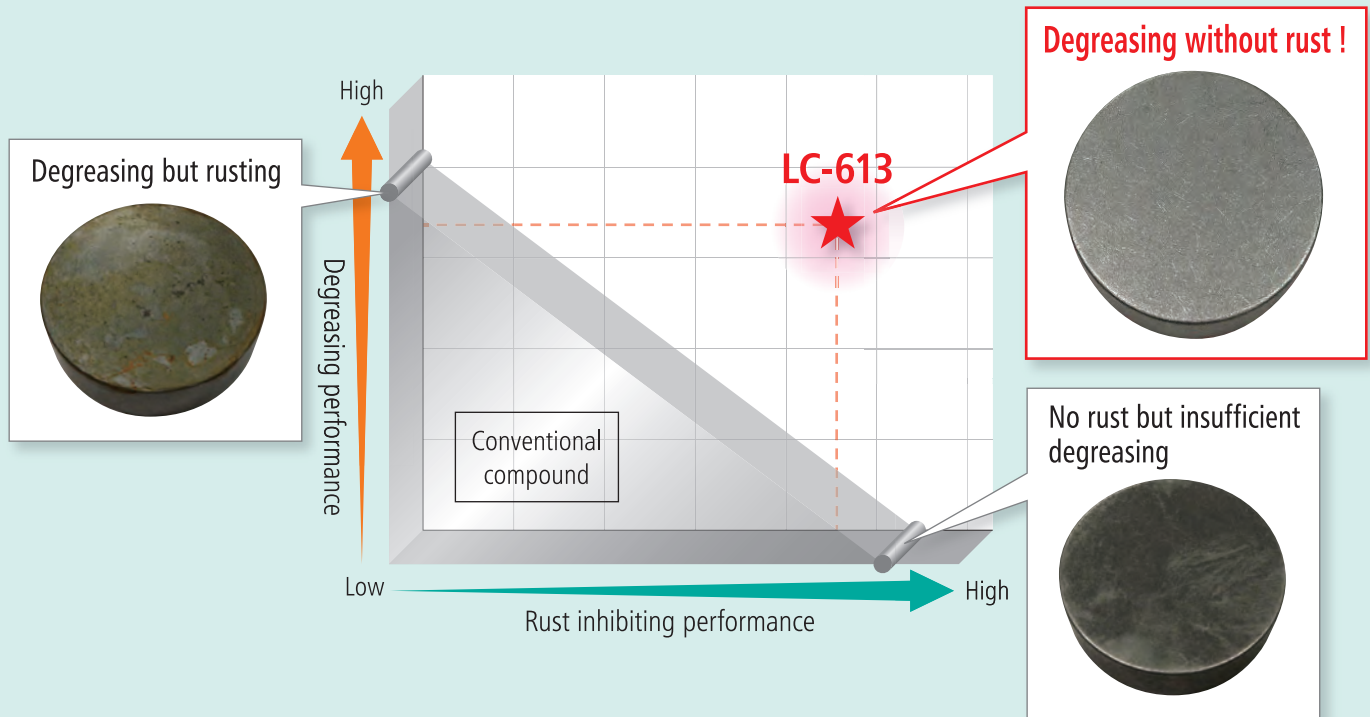

Comparison of barrel tub appearance

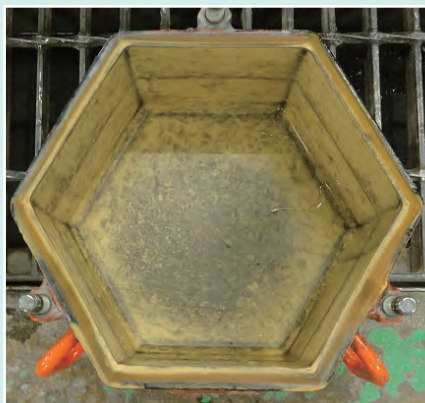

Conventional compound



LC-613

Specifications	LC-613
pH (1% solution)	11.6 *Representative value
BOD, COD (0.1% solution)	BOD:20mg/L, COD:8.8mg/L
Phosphorus, nitrogen (Undiluted solution)	Phosphorus: 0.2 wt%, nitrogen: 0.6 wt%
Usage amount (per 1 liter of water)	10~20ml
Package	18kg/can

*Please refer to SDS on storage precautions

Contact for product information and purchase

TIPTON Tipton Corp.

Head Office 3-19-21 Toyoda, Minami-Ku, Nagoya, Aichi Prefecture 457-8566 Japan
Tel: +81-52-692-6666 Fax: +81-52-692-9445

Overseas Sales 3-19-21 Toyoda, Minami-Ku, Nagoya, Aichi Prefecture 457-8566 Japan
Tel: +81-52-692-0901 Fax: +81-52-692-9445

Tobishima Factory 3-25-1 Odakara, Tobishima-Mura, Ama-Gun, Aichi Prefecture 490-1438 Japan
Tel: +81-567-56-7500 Fax: +81-567-56-7513

<https://www.tipton.co.jp/english/> E-mail overseas@tipton.co.jp